


Machine Not In Use – Klix

For extended periods of hibernation, the machine should be both isolated from the mains power and water supply. And where possible drained of water as described below.

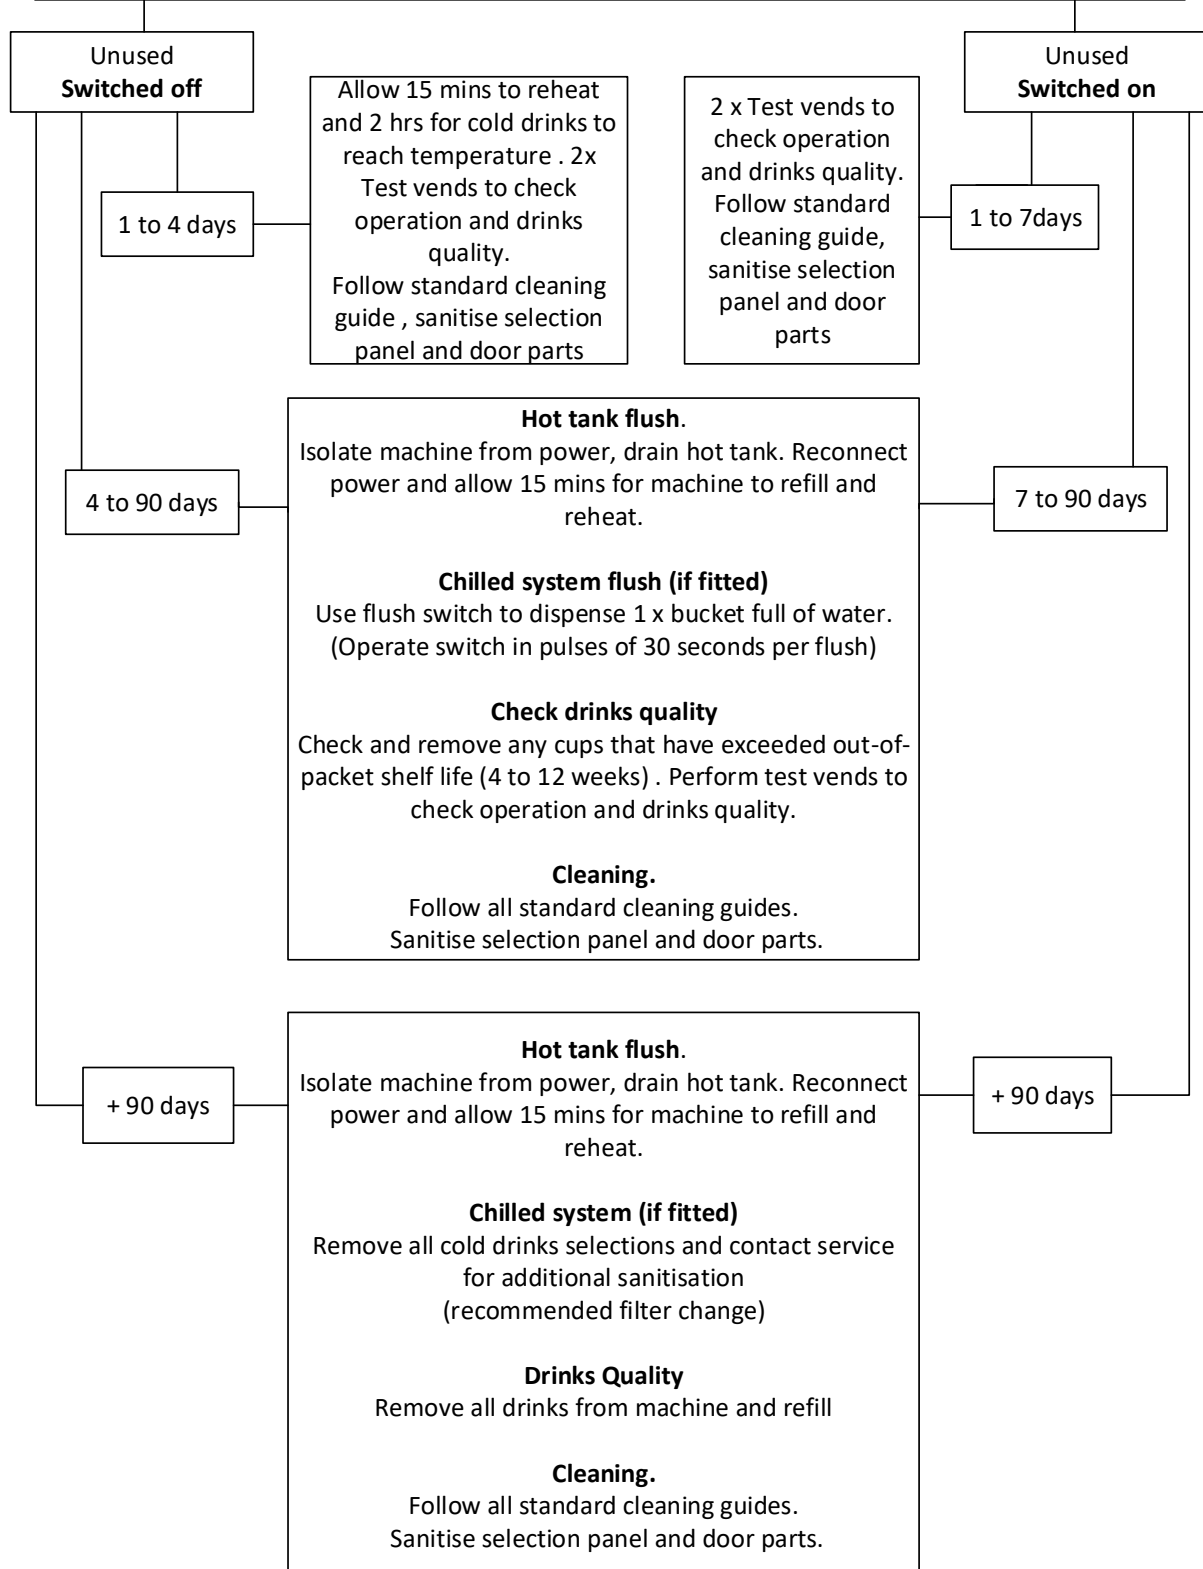

Machine tank drain and flush

Before switching back on wipe down the front of your machine with anti-bacterial wipes making sure to include all selection buttons, coin insert and change cup. Follow steps below to drain hot tank

Care must be taken when draining tank as hot water and risk of scalding.

Step 1



Isolate power to machine by either switching off mains plug or removing internal plug which is located inside machine on the back- left hand side of carousel.

Step 2



Locate the grey drain tube which will be attached to the metal tank guard, it will have a white plug on the end and a white clamp attached to it.

Step3



Pic 1



Pic 2

Before removing the drain tube please check that the clamp is in the closed position (pic 1) if not then push together until closed before removing drain plug.

Step 4



Remove drain plug from bottom of drain tube and place into cup holder of the drum making sure bucket is in place below.

Step 5




Care must be taken when draining tank for hot water and risk of scalding.



Open the clamp by pushing down on the bottom part of the clip releasing the clamp to open as per pic.

After completing drain down, refit the bung , clamp and hose to the machine, empty and refit the bucket, reconnect power and wait 15 mins for the machine to refill and reheat. Perform test vends to ensure operation and drinks quality

Chilled Water System Flush (if fitted or required)

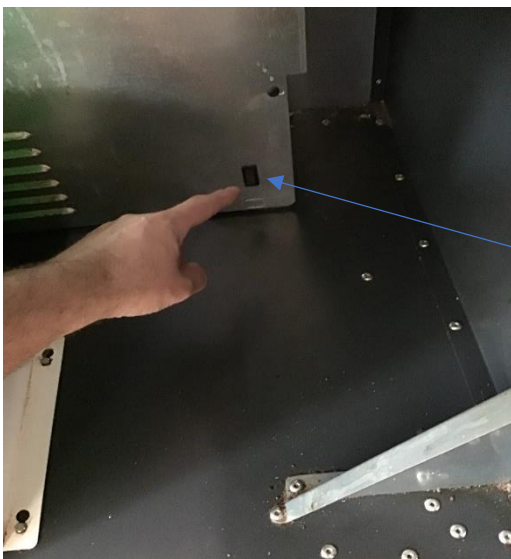

With the machine switched on and with the drum, drip tray and bucket in place. Press the flush switch, (right hand side of chiller) for 30 seconds at a time for one full bucket.